


Основная метрическая резьба ISO DIN-13

ISO Metric coarse thread DIN-13

Metrisches ISO-Regelgewinde DIN-13



HSSE

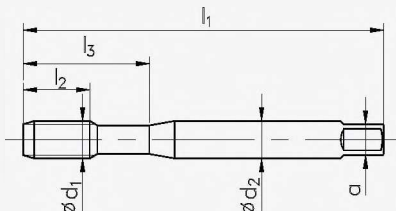

DIN-371



ПРИМЕНЕНИЕ / Application / Einsatzgebiete

500

800

800

800

800

800

800

ОБРАБАТЫВАЕМЫЕ МАТЕРИАЛЫ / Material / Werkstoff

P1.1-P1.2

P1.3

P1.2-P1.3

P1.2-P1.3
N4.5, N4.8

P1.3

P1.3

P1.3

ИЗГОТОВЛЕН ИЗ / Quality of material / Qualität

HSSE

HSSE

HSSE

HSSE

HSSE

HSSE

HSSE

ТИП ОТВЕРСТИЯ / Hole type / Lochform



ИСПОЛНЕНИЕ / Execution / Ausführung

R45

R40

R40

R40

R40

R40

L40 LH

ПОКРЫТИЕ / Coating / Beschichtung

OX

OX

TIN

СБЕГ РЕЗЬБЫ / Chamfer / Anschnitt

C / 2-3P

C / 2-3P

C / 2-3P

C / 2-3P

C / 2-3P

C / 2-3P

C / 2-3P

ТОЧНОСТЬ / Tolerance / Toleranz

ISO2 (6H)

ISO2 (6H)

ISO2 (6H)

ISO2 (6H)

ISO3 (6G)

7G*

ISO2 (6H)

M Ød ₁	P	l ₁	l ₂ R15	l ₂	l ₃	Ød ₂	a		INDEX	C2-526201	C2-511101	C2-516101	C2-513101	C2-511103	C2-511104	C2-591101
M 2	0,4	45		8		2,8	2,1	1,6	0020		●	○	○			
M 2,5	0,45	50		9		2,8	2,1	2,05	0025		●	○	○			
M 2,6	0,45	50		9		2,8	2,1	2,1	0026		○	○	○			
M 3	0,5	56	11	5	18	3,5	2,7	2,5	0030	●	●	●	●	●	●	●
M 3,5	0,6	56	12	6	20	4	3	2,9	0035	○	●	○	○	○	○	○
M 4	0,7	63	13	7	21	4,5	3,4	3,3	0040	●	●	●	●	●	●	●
M 4,5	0,75	70	14	7,5	25	6	4,9	3,8	0045	○	●	○	○	○	○	○
M 5	0,8	70	15	8	25	6	4,9	4,2	0050	●	●	●	●	●	●	●
M 6	1	80	17	10	30	6	4,9	5	0060	●	●	●	●	●	●	●
M 7	1	80	17	10	30	7	5,5	6	0070	○	●	○	○	○	○	○
M 8	1,25	90	20	13	35	8	6,2	6,8	0080	●	●	●	●	●	●	●
M 9	1,25	90	20	13	35	9	7	7,8	0090	○	●	○	○	○	○	○
M 10	1,5	100	20	15	39	10	8	8,5	0100	●	●	●	●	●	●	●

* Точность 6H +0,1 - под заказ

* Tolerance 6H +0,1 on request

* In Toleranz 6H +0,1 - auf Anfrage

ПРИМЕР ДЛЯ ЗАКАЗА / Example of order / Beispiel einer Bestellung:

C2-511101-0050
DIN-371 C M5 ISO2 R40 HSSE 800

● В наличии на складе / On stock / Ab Lager

○ Под заказ / On request / Auf Anfrage