
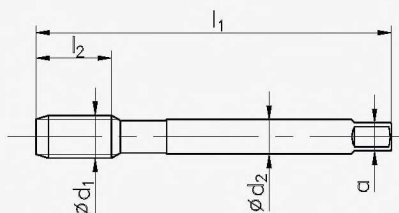


## Основная метрическая резьба ISO DIN-13

ISO Metric coarse thread DIN-13

Metrisches ISO-Regelgewinde DIN-13

HSSE  
PM

## DIN-376



ПРИМЕНЕНИЕ / Application / Einsatzgebiete

ОБРАБАТЫВАЕМЫЕ МАТЕРИАЛЫ / Material / Werkstoff

ИЗГОТОВЛЕН ИЗ / Quality of material / Qualität








ТИП ОТВЕРСТИЯ / Hole type / Lochform


ИСПОЛНЕНИЕ / Execution / Ausführung

ПОКРЫТИЕ / Coating / Beschichtung

СБЕГ РЕЗЬБЫ / Chamfer / Anschnitt

ТОЧНОСТЬ / Tolerance / Toleranz

FAN	FAN	FAN	TI**	TI**	NI**	1400
P1.4-P1.5, M2.1-M2.3, K3.2-K3.3	P1.3-P1.4, K3.2-K3.3	P1.3-P1.4, K3.2-K3.3	S5.1	P1.6, M2.3 S5.2-S5.3	S5.4	P1.5-P1.6, K3.1-K3.3, N4.6, N4.9
HSSE-PM	HSSE-PM	HSSE-PM	HSSE-PM	HSSE-PM	HSSE-PM	HSSE-PM
						
<1,5d	<2,5d	<2,5d	<1,5d	<1,5d	<1,5d	<1,5d
R40	R45	R45 IK	R15	R15	R15	R15
TICN	TICN	HL	OX	TICN		TICN
C / 2-3P	E / 1,5-2P	E / 1,5-2P	C / 2-3P	C / 2-3P	C / 2-3P	C / 2-3P
ISO3 (6G)	ISO2 (6H)	ISO2 (6H)	6HX	6HX	6HX	6HX

M Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub> R15	l <sub>2</sub>	Ød <sub>2</sub>	a		INDEX	D4-565003	D4-715001	D4-718051	D4-506B01	D4-505B01	D4-501C01	D4-505901
M 4	0,7	63	13	7	2,8	2,1	3,3	0040	o	o					
M 5	0,8	70	16	8	3,5	2,7	4,2	0050	o	o	o	o	o	o	o
M 6	1	80	19	10	4,5	3,4	5	0060	o	o	o	o	o	o	o
M 8	1,25	90	22	13	6	4,9	6,8	0080	o	o	o	o	o	o	o
M 10	1,5	100	24	15	7	5,5	8,5	0100	o	o	o	o	o	o	o
M 12	1,75	110	29	18	9	7	10,2	0120	●	●	●	o	o	o	●
M 14	2	110	30	20	11	9	12	0140	o	o	o	o	o	o	o
M 16	2	110	32	20	12	9	14	0160	●	●	●	o	o	o	●
M 18	2,5	125	34	25	14	11	15,5	0180	o	o	o				o
M 20	2,5	140	34	25	16	12	17,5	0200	o	o	o				o
M 22	2,5	140	34	25	18	14,5	19,5	0220	o	o	o				o
M 24	3	160	38	30	18	14,5	21	0240	o	o	o				o
M 27	3	160	38	30	20	16	24	0270	o	o					o
M 30	3,5	180	45	35	22	18	26,5	0300	o	o					o
M 33	3,5	180	50	35	25	20	29,5	0330	o	o					o
M 36	4	200	56	40	28	22	32	0360	o	o					o
M 39	4	200	55	40	32	24	35	0390	o	o					
M 42	4,5	200	60	45	32	24	37,5	0420	o	o					

\*\* Класс h6 точности хвостовика - по заказу

\*\* h6 class shank on request

\*\* Auf Wunsch Schaft in h6

ПРИМЕР ДЛЯ ЗАКАЗА / Example of order / Beispiel einer Bestellung:

D4-565003-0160

DIN-376 C M16 6G R40 HSSE-PM FAN TICN

● В наличии на складе / On stock / Ab Lager

○ Под заказ / On request / Auf Anfrage