


## Основная метрическая резьба ISO DIN-13

ISO Metric coarse thread DIN-13

Metrisches ISO-Regelgewinde DIN-13



HSSE  
HSSE  
PM

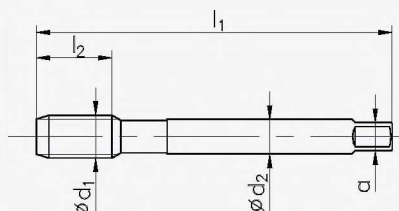

## DIN-376



ПРИМЕНЕНИЕ / Application / Einsatzgebiete

1400\*\*

GAL

GAL\*\*

AL

ОБРАБАТЫВАЕМЫЕ МАТЕРИАЛЫ / Material / Werkstoff

P1.5-P1.6, K3.1  
-K3.3, N4.6, N4.9

N4.2-N4.3

P1.4-P1.5, K3.1  
-K3.3, N4.2-N4.3

N4.1

ИЗГОТОВЛЕН ИЗ / Quality of material / Qualität

HSSE-PM

HSSE

HSSE-PM

HSSE

ТИП ОТВЕРСТИЯ / Hole type / Lochform



<1,5d



<2,5d



<2,5d



<2,5d

ИСПОЛНЕНИЕ / Execution / Ausführung

R15 IK

R15

R15 IK

R45

ПОКРЫТИЕ / Coating / Beschichtung

TiCN

TiCN

TiCN

СБЕГ РЕЗЬБЫ / Chamfer / Anschnitt

C / 2-3P

C / 2-3P

E / 1,5-2P

C / 2-3P

ТОЧНОСТЬ / Tolerance / Toleranz

6HX

6HX

6HX

ISO2 (6H)

M Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub> R15	l <sub>2</sub>	Ød <sub>2</sub>	a		INDEX	D4-505951	D2-505601	D2-655651	D2-521701
M 4	0,7	63	13	7	2,8	2,1	3,3	0040		o		o
M 5	0,8	70	16	8	3,5	2,7	4,2	0050	o	o	o	o
M 6	1	80	19	10	4,5	3,4	5	0060	o	o	o	o
M 8	1,25	90	22	13	6	4,9	6,8	0080	o	o	o	o
M 10	1,5	100	24	15	7	5,5	8,5	0100	o	o	o	o
M 12	1,75	110	29	18	9	7	10,2	0120	●	●	●	o
M 14	2	110	30	20	11	9	12	0140	o	o	o	o
M 16	2	110	32	20	12	9	14	0160	●	●	●	o
M 18	2,5	125	34	25	14	11	15,5	0180	o	o	o	o
M 20	2,5	140	34	25	16	12	17,5	0200	o	o	o	o
M 22	2,5	140	34	25	18	14,5	19,5	0220	o	o	o	o
M 24	3	160	38	30	18	14,5	21	0240	o	o	o	o
M 27	3	160	38	30	20	16	24	0270		o		o
M 30	3,5	180	45	35	22	18	26,5	0300		o		o
M 33	3,5	180	50	35	25	20	29,5	0330		o		o
M 36	4	200	56	40	28	22	32	0360		o		o
M 39	4	200	55	40	32	24	35	0390		o		
M 42	4,5	200	60	45	32	24	37,5	0420		o		



\*\* Класс h6 точности хвостовика - под заказ  
\*\*\* h6 class shank on request  
\*\*\* Auf Wunsch Schaft in h6

ПРИМЕР ДЛЯ ЗАКАЗА / Example of order / Beispiel einer Bestellung:

D2-505601-0120

DIN-376 C M12 6HX R15 HSSE GAL TiCN

● В наличии на складе / On stock / Ab Lager

○ Под заказ / On request / Auf Anfrage