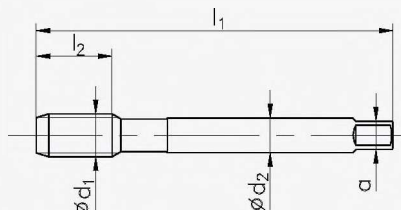


## Основная метрическая резьба ISO DIN-13

ISO Metric coarse thread DIN-13

Metrisches ISO-Regelgewinde DIN-13

HSSE  
PM

## DIN-376



ПРИМЕНЕНИЕ / Application / Einsatzgebiete

S-NC\*\*

S-NC\*\*

S-NC\*\*

S-NC\*\*

ОБРАБАТЫВАЕМЫЕ МАТЕРИАЛЫ / Material / Werkstoff

P1.1-P1.5  
M2.1-M2.3  
K3.2-K3.3  
N4.2,N4.4-N4.5  
N4.7-N4.8P1.1-P1.5  
M2.1-M2.3  
K3.2-K3.3  
N4.2,N4.4-N4.5P1.1-P1.4  
M2.1  
N4.4-N4.5P1.1-P1.4  
M2.1  
N4.4-N4.5

ИЗГОТОВЛЕН ИЗ / Quality of material / Qualität

HSSE-PM

HSSE-PM

HSSE-PM

HSSE-PM

ТИП ОТВЕРСТИЯ / Hole type / Lochform



&lt;3d

&lt;3d

&lt;2.5d

&lt;2.5d

ИСПОЛНЕНИЕ / Execution / Ausführung

B

B IKR

R45

R45 IK

ПОКРЫТИЕ / Coating / Beschichtung

TiCN

HL

TiCN

HL

СБЕГ РЕЗЬБЫ / Chamfer / Anschnitt

B / 4-5P

B / 4-5P

C / 2-3P

E / 1,5-2P


ТОЧНОСТЬ / Tolerance / Toleranz

ISO2 (6H)

ISO2 (6H)

ISO2 (6H)

ISO2 (6H)

M Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	Ød <sub>2</sub>	a		INDEX	D4-115301	D4-118361	D4-525301	D4-718351
M 12	1,75	110	18	9	7	10,2	0140	●	○	●	○
M 14	2	110	20	11	9	12	0140	○	○	○	○
M 16	2	110	20	12	9	14	0160	●	○	●	○

Рекомендуется для применения на станках с ЧПУ

S-NC - especially advisable for CNC machines

S-NC - bevorzugt für CNC-Maschinen

\*\* Класс h6 точности хвостовика - под заказ

\*\* h6 class shank on request

\*\* Auf Wunsch Schaft in h6