


## Основная метрическая резьба ISO DIN-13

ISO Metric coarse thread DIN-13

Metrisches ISO-Regelgewinde DIN-13



HSS

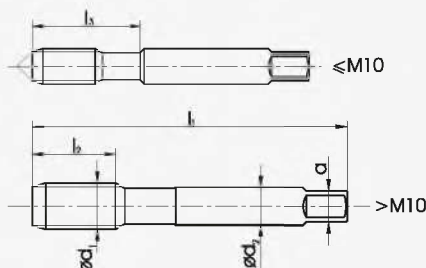

## ISO-529 / DIN-352



ОБРАБАТЫВАЕМЫЕ МАТЕРИАЛЫ / Material / Werkstoff

P1.2-P1.4

P1.2-P1.4

ИЗГОТОВЛЕН ИЗ / Quality of material / Qualität

HSS

HSS

ТИП ОТВЕРСТИЯ / Hole type / Lochform



ИСПОЛНЕНИЕ / Execution / Ausführung

LH

СБЕГ РЕЗЬБЫ / Chamfer / Anschnitt


D / 4P

D / 4P

ТОЧНОСТЬ / Tolerance / Toleranz

ISO2 (6H)

ISO2 (6H)

M Ød <sub>1</sub>	P	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	Ød <sub>2</sub>	a						
ISO-529								INDEX	B1-131001	B1-231001		
M 3	0,5	48	11	18	3,15	2,5	2,5	0035	●	○		
M 3,5	0,6	50	13	20	3,55	2,8	2,9	0035	●	○		
M 4	0,7	53	13	21	4	3,15	3,3	0040	●	○		
M 4,5	0,75	53	13	21	4,5	3,55	3,8	0045	○	○		
M 5	0,8	58	16	25	5	4	4,2	0050	●	○		
M 6	1	66	19	30	6,3	5	5	0060	●	○		
M 7	1	66	19	30	7,1	5,6	6	0070	●	○		
M 8	1,25	72	22	35	8	6,3	6,8	0080	●	○		
M 9	1,25	72	22	36	9	7,1	7,8	0090	●	○		
M 10	1,5	80	24	39	10	8	8,5	0100	●	○		
M 11	1,5	85	25		8	6,3	9,5	0110	●	○		
M 12	1,75	89	29		9	7,1	10,2	0120	●	○		
DIN-352								INDEX	E1-131001	E1-231001		
M 14	2	80	26		11	9	12	0140	●	○		
M 16	2	80	27		12	9	14	0160	●	○		
M 18	2,5	95	30		14	11	15,5	0180	●	○		
M 20	2,5	95	32		16	12	17,5	0200	●	○		
M 22	2,5	100	32		18	14,5	19,5	0220	●	○		
M 24	3	110	34		18	14,5	21	0240	●	○		
M 27	3	110	36		20	16	24	0270	●	○		
M 30	3,5	125	40		22	18	26,5	0300	●	○		
M 33	3,5	125	40		25	20	29,5	0330	○	○		
M 36	4	150	50		28	22	32	0360	●	○		
M 39	4	150	50		32	24	35	0390	○	○		
M 42	4,5	150	56		32	24	37,5	0420	●	○		
M 45	4,5	160	58		36	29	40,5	0450	○	○		
M 48	5	180	65		36	29	43	0480	●	○		
M 52	5	180	65		40	32	47	0520	○	○		
M 56	5,5	180	70		40	32	50,5	0560	●	○		
M 60	5,5	200	70		45	35	54,5	0600	○	○		
M 64	6	220	75		50	39	58	0640	●	○		
M 68	6	220	75		50	39	62	0680	○	○		

ПРИМЕР ДЛЯ ЗАКАЗА / Example of order / Beispiel einer Bestellung:

B1-131001-0030  
ISO-529 D M3 ISO2 HSS

● В наличии на складе / On stock / Ab Lager

○ Под заказ / On request / Auf Anfrage