


Американская унифицированная резьба UNC, ANSI B-1.1

American unified coarse thread UNC, ANSI B-1.1

Amerikanisches Unified - Grobgewinde UNC, ANSI B-1.1



HSS

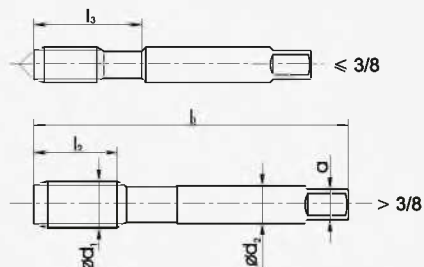

ОБРАБАТЫВАЕМЫЕ МАТЕРИАЛЫ / Material / Werkstoff

P1.2-P1.4

ИЗГОТОВЛЕН ИЗ / Quality of material / Qualität

HSS

ТИП ОТВЕРСТИЯ / Hole type / Lochform




ИСПОЛНЕНИЕ / Execution / Ausführung

СБЕГ РЕЗЬБЫ / Chamfer / Anschnitt

D / 4P

ТОЧНОСТЬ / Tolerance / Toleranz

2B

UNC	Ød ₁	1"/P	P	l ₁	l ₂	l ₃	Ød ₂	a									
ISO-529										INDEX	B1-131001						
No 5 - 40	3,175	40	0,635	48	11	18	3,15	2,5	2,6	4105	●						
No 6 - 32	3,505	32	0,794	50	13	18	3,55	2,8	2,7	4106	●						
No 8 - 32	4,166	32	0,794	53	13	19	4,5	3,55	3,5	4108	●						
No 10 - 24	4,826	24	1,058	58	16	23	5	4	3,8	4110	●						
No 12 - 24	5,486	24	1,058	62	17	26	5,6	4,5	4,5	4112	●						
1/4 - 20	6,350	20	1,270	66	19	28	6,3	5	5,1	4127	●						
5/16 - 18	7,938	18	1,411	72	22	32	8	6,3	6,5	4128	●						
3/8 - 16	9,525	16	1,588	80	24	36	10	8	7,9	4129	●						
7/16 - 14	11,112	14	1,814	85	25		8	6,3	9,3	4130	●						
DIN-352										INDEX	E1-131001						
1/2 - 13	12,700	13	1,954	75	25		9	7	10,7	4131	●						
9/16 - 12	14,288	12	2,117	80	26		11	9	12,3	4132	●						
5/8 - 11	15,875	11	2,309	80	27		12	9	13,5	4133	●						
3/4 - 10	19,050	10	2,504	95	32		14	11	16,5	4135	●						
7/8 - 9	22,225	9	2,822	100	32		18	14,5	19,5	4137	●						
1 - 8	25,400	8	3,175	110	36		18	14,5	22,25	4139	●						
1.1/8 - 7	28,575	7	3,629	125	40		22	18	25	4141	○						
1.1/4 - 7	31,750	7	3,629	125	40		22	18	28	4143	○						
1.3/8 - 6	34,925	6	4,233	150	50		28	22	30,7	4145	○						
1.1/2 - 6	38,100	6	4,233	150	50		28	22	34	4147	○						
1.3/4 - 5	44,450	5	5,080	160	58		36	29	39,5	4151	○						
2 - 4.1/2	50,800	4.1/2	5,645	180	65		40	32	45	4155	○						

ПРИМЕР ДЛЯ ЗАКАЗА / Example of order / Beispiel einer Bestellung:

E1-131001-4131
DIN-352 D 1/2-13 UNC 2B HSS

● В наличии на складе / On stock / Ab Lager

○ Под заказ / On request / Auf Anfrage