




Do obróbki większości gatunków stali i staliw

For machining most types of steel and and cast steel

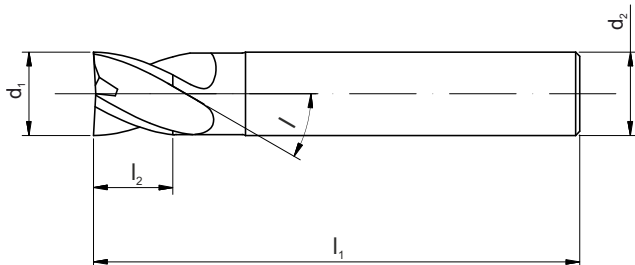

### STL



#### Zastosowanie / Application

P 1+14

P 1+14

P 1+14

P 1+14

#### Wykonanie / Design



#### Rodzaj powłoki / Coating

TiAlN

INDEX

d <sub>1</sub>	d <sub>2</sub>	l <sub>1</sub>	l <sub>2</sub>	Z	R*	TiAlN INDEX			
3	3	39	12	4	0,3	M9-434100-0030	-	M9-43410D-0030	-
4	4	50	14	4	0,3	M9-434100-0040	-	M9-43410D-0040	-
5	6	50	16	4	0,3	M9-434100-0050	M9-434100-0050-B	M9-43410D-0050	M9-43410D-0050-B
6	6	50	19	4	0,5	M9-434100-0060	M9-434100-0060-B	M9-434101-0060	M9-434101-0060-B
7	8	58	19	4	0,5	M9-434100-0070	M9-434100-0070-B	M9-434101-0070	M9-434101-0070-B
8	8	58	20	4	0,5	M9-434100-0080	M9-434100-0080-B	M9-434101-0080	M9-434101-0080-B
9	10	72	22	4	0,5	M9-434100-0090	M9-434100-0090-B	M9-434101-0090	M9-434101-0090-B
10	10	72	22	4	0,5	M9-434100-0100	M9-434100-0100-B	M9-434101-0100	M9-434101-0100-B
11	12	73	25	4	0,7	M9-434100-0110	M9-434100-0110-B	M9-434102-0110	M9-434102-0110-B
12	12	73	25	4	0,7	M9-434100-0120	M9-434100-0120-B	M9-434102-0120	M9-434102-0120-B
14	14	83	32	4	0,7	M9-434100-0140	M9-434100-0140-B	M9-434102-0140	M9-434102-0140-B
16	16	92	32	4	1	M9-434100-0160	M9-434100-0160-B	M9-434103-0160	M9-434103-0160-B
18	18	100	38	4	1	M9-434100-0180	M9-434100-0180-B	M9-434103-0180	M9-434103-0180-B
20	20	100	38	4	1	M9-434100-0200	M9-434100-0200-B	M9-434103-0200	M9-434103-0200-B

\*dotyczy wersji R  
for tools with radius

Parametry skrawania str. 83  
Cutting data page 83