



Z=2


l = 30°

VHM

TiAlN

Do obróbki większości gatunków stali i staliw

For machining most types of steel and and cast steel

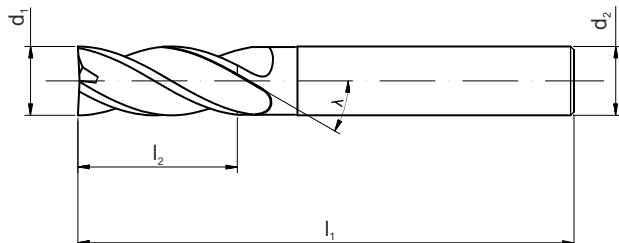

STL

R230L

R230L




Zastosowanie / Application

P 1+14

P 1+14

Wykonanie / Design



Rodzaj powłoki / Coating

TiAlN

INDEX

d ₁	d ₂	l ₁	l ₂	Z	R	TiAlN INDEX	
6	6	75	15	2	0,5	M9-234121-0060	M9-234121-0060-B
6	6	100	15	2	0,5	M9-234121-0060A	M9-234121-0060A-B
8	8	100	20	2	0,5	M9-234121-0080	M9-234121-0080-B
10	10	100	25	2	0,5	M9-234121-0100	M9-234121-0100-B
10	10	150	25	2	0,5	M9-234121-0100A	M9-234121-0100A-B
12	12	100	30	2	0,7	M9-234122-0120	M9-234122-0120-B
12	12	150	30	2	0,7	M9-234122-0120A	M9-234122-0120A-B

Parametry skrawania str. 84
Cutting data page 84

