


Uniwersalne zastosowanie do szerokiej gamy typowych materiałów

Universal application for many groups of typical materials

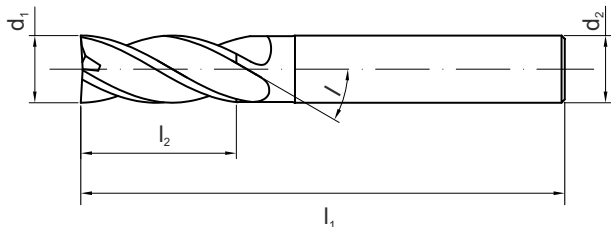

Zastosowanie / Application	230	230																								
	<table border="1"> <tr><td>P</td><td>3+12</td><td>1+2</td></tr> <tr><td>K</td><td>1+6</td><td></td></tr> <tr><td>N</td><td>7+9</td><td></td></tr> <tr><td>H</td><td>1</td><td>2 4</td></tr> </table>	P	3+12	1+2	K	1+6		N	7+9		H	1	2 4	<table border="1"> <tr><td>P</td><td>3+12</td><td>1+2</td></tr> <tr><td>K</td><td>1+6</td><td></td></tr> <tr><td>N</td><td>7+9</td><td></td></tr> <tr><td>H</td><td>1</td><td>2 4</td></tr> </table>	P	3+12	1+2	K	1+6		N	7+9		H	1	2 4
P	3+12	1+2																								
K	1+6																									
N	7+9																									
H	1	2 4																								
P	3+12	1+2																								
K	1+6																									
N	7+9																									
H	1	2 4																								

Wykonanie / Design	230	230

Rodzaj powłoki / Coating					TiAlN	
ød ₁	d ₂	l ₁	l ₂	Z	INDEX	
Wersja MICRO						
1	4	50	3	2	M9-220418-0010	-
1,5	4	50	4	2	M9-220418-0015	-
2	4	50	6	2	M9-220418-0020	-
2,5	4	50	8	2	M9-220418-0025	-
3	4	50	8	2	M9-220418-0030	-
Wersja STANDARD						
4	4	50	11	2	M9-220418-0040	-
5	6	50	13	2	M9-220418-0050	M9-220418-0050-B
6	6	50	16	2	M9-220418-0060	M9-220418-0060-B
8	8	58	20	2	M9-220418-0080	M9-220418-0080-B
10	10	72	25	2	M9-220418-0100	M9-220418-0100-B
12	12	73	30	2	M9-220418-0120	M9-220418-0120-B
14	14	83	35	2	M9-220418-0140	M9-220418-0140-B
16	16	92	40	2	M9-220418-0160	M9-220418-0160-B
18	18	100	45	2	M9-220418-0180	M9-220418-0180-B
20	20	100	45	2	M9-220418-0200	M9-220418-0200-B

Parametry skrawania str. 93
Cutting data page 93