




Uniwersalne zastosowanie do szerokiej gamy typowych materiałów

Universal application for many groups of typical materials

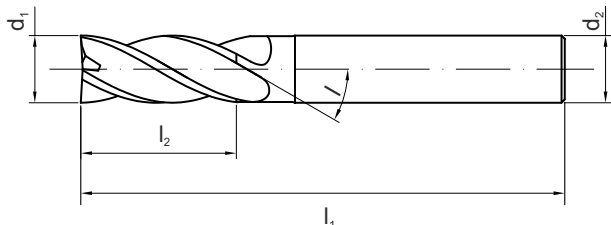

OPTI

430

430





Zastosowanie / Application

P	3+12	1+2
K	1+6	
N	7+9	
H	1	2 4

P	3+12	1+2
K	1+6	
N	7+9	
H	1	2 4

Wykonanie / Design



Rodzaj powłoki / Coating

TiAlN

INDEX

Wersja MICRO

d ₁	d ₂	l ₁	l ₂	Z		
1	4	50	3	4	M9-120518-0010	-
1,5	4	50	4	4	M9-120518-0015	-
2	4	50	6	4	M9-120518-0020	-
2,5	4	50	8	4	M9-120518-0025	-
3	4	50	8	4	M9-120518-0030	-

Wersja STANDARD

4	4	50	11	4	M9-120518-0040	-
5	6	50	13	4	M9-120518-0050	M9-120518-0050-B
6	6	50	16	4	M9-120518-0060	M9-120518-0060-B
8	8	58	20	4	M9-120518-0080	M9-120518-0080-B
10	10	72	25	4	M9-120518-0100	M9-120518-0100-B
12	12	73	30	4	M9-120518-0120	M9-120518-0120-B
14	14	83	35	4	M9-120518-0140	M9-120518-0140-B
16	16	92	40	4	M9-120518-0160	M9-120518-0160-B
18	18	100	45	4	M9-120518-0180	M9-120518-0180-B
20	20	100	45	4	M9-120518-0200	M9-120518-0200-B

Parametry skrawania str. 95
Cutting data page 95