




Uniwersalne zastosowanie do szerokiej gamy typowych materiałów

Universal application for many groups of typical materials

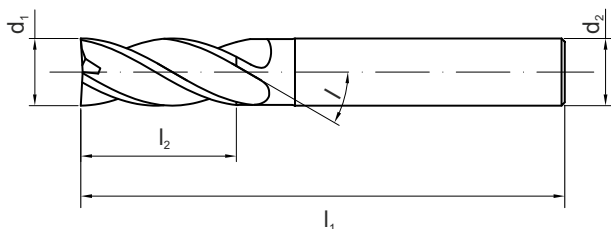

### OPTI

230L

230L




#### Zastosowanie / Application

P	3+12	1+2
K	1+6	
N	7+9	
H	1	2 4

P	3+12	1+2
K	1+6	
N	7+9	
H	1	2 4

#### Wykonanie / Design



#### Rodzaj powłoki / Coating

d <sub>1</sub>	d <sub>2</sub>	l <sub>1</sub>	l <sub>2</sub>	Z	TiAlN	
					INDEX	
6	6	75	15	2	M9-121418-0060	M9-121418-0060-B
6	6	100	15	2	M9-121418-0060A	M9-121418-0060A-B
8	8	100	20	2	M9-121418-0080	M9-121418-0080-B
10	10	100	25	2	M9-121418-0100	M9-121418-0100-B
10	10	150	25	2	M9-121418-0100A	M9-121418-0100A-B
12	12	100	30	2	M9-121418-0120	M9-121418-0120-B
12	12	150	30	2	M9-121418-0120A	M9-121418-0120A-B

Parametry skrawania str. 96

Cutting data page 96