




Uniwersalne zastosowanie do szerokiej gamy typowych materiałów

Universal application for many groups of typical materials

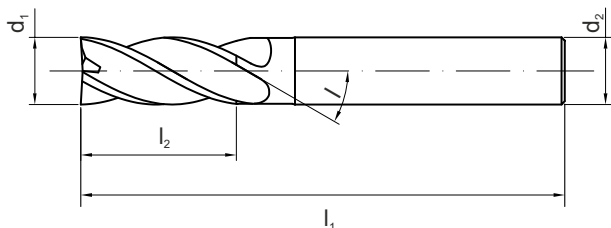

OPTI

430L

430L





Zastosowanie / Application

P	3+12	1+2
K	1+6	
N	7+9	
H	1	2 4

P	3+12	1+2
K	1+6	
N	7+9	
H	1	2 4

Wykonanie / Design



Rodzaj powłoki / Coating

d ₁	d ₂	l ₁	l ₂	Z	TiAlN	
					INDEX	
2	4	50	15	4	M9-434021-0020	-
3	4	50	20	4	M9-434021-0030	-
4	4	75	25	4	M9-434021-0040	-
5	6	75	30	4	M9-434021-0050	M9-434021-0050-B
6	6	75	30	4	M9-434021-0060	M9-434021-0060-B
8	8	100	40	4	M9-434021-0080	M9-434021-0080-B
10	10	100	40	4	M9-434021-0100	M9-434021-0100-B
12	12	100	45	4	M9-434021-0120	M9-434021-0120-B
16	16	150	60	4	M9-434021-0160	M9-434021-0160-B
20	20	150	60	4	M9-434021-0200	M9-434021-0200-B

Parametry skrawania str. 97
Cutting data page 97