


$\lambda = 30^\circ$ HSS Co5



OPTI

DIN-844

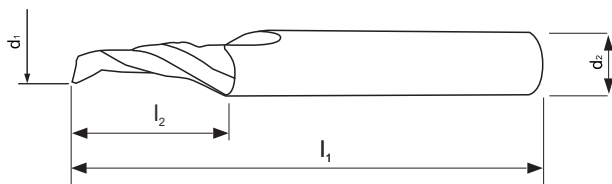

Zastosowanie / Application

N 1+4 6+9 5

Wykonanie / Design



d, js16	d ₂ h6	l ₁	l ₂	Z	INDEX
3	8	60	12	1	M2-100405-0030
4	8	60	12	1	M2-100405-0040
5	8	60	13	1	M2-100405-0050
6	8	60	16	1	M2-100405-0060
7	8	60	16	1	M2-100405-0070
8	8	80	16	1	M2-100405-0080
10	10	80	15	1	M2-100405-0100

Parametry skrawania str. 101-102
Cutting data page 101-102