


$\angle = 45^\circ$  HSS Co5



**OPTI**

DIN-845

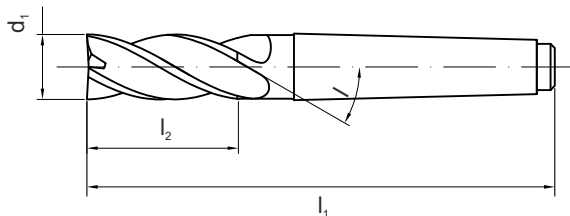

z chwytem Morse'a / Morse taper shank

Zastosowanie / Application

P	1+6	7+14
M	1+3	
K	1+3	5+6 4
N	6+9	
S	6+8	
H	1, 2, 4	

Wykonanie / Design



d, k10	$l_1$	$l_2$	MK	Z	INDEX
10	92	22	1	4	M2-420245-0100
12	111	26	2	4	M2-420245-0120
14	111	26	2	4	M2-420245-0140
16	117	32	2	4	M2-420245-0160
18	117	32	2	4	M2-420245-0180
20	123	38	2	4	M2-420245-0200
22	123	38	2	5	M2-420245-0220
25	147	45	3	5	M2-420245-0250
28	147	45	3	5	M2-420245-0280
30	147	45	3	6	M2-420245-0300
32	178	53	4	6	M2-420245-0320
36	178	53	4	6	M2-420245-0360
40	188	63	4	6	M2-420245-0400
45	188	63	4	6	M2-420245-0450
50	233	75	5	6	M2-420245-0500
56	233	75	5	8	M2-420245-0560
63	248	90	5	8	M2-420245-0630

Parametry skrawania str. 101-102  
Cutting data page 101-102